




# SPREAD-ALL

## Complete Offering of Grain Spreaders

**SA-93**  
**SPREAD-ALL SPECIAL**  
 For 6" & 8" Auger  
 Without Reversing

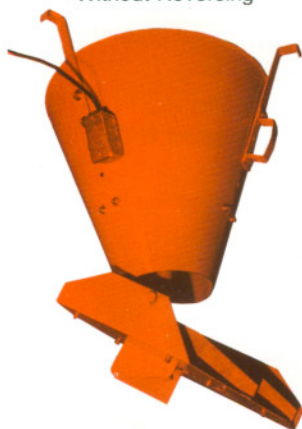

Capacity: Up to 3000 Bu./Hr.  
*(Depending on grain and Moisture)*  
 Motor: 1/3 H.P., 115 V.  
 Powered: Oil Bath Gear Case  
 Weight: 75 lbs.  
 Bin Diameters: 18 Ft. to 36 Ft.  
 Vary the Spread by Tilting Pan

**SA-94**  
**E-2 COMPACT**  
 For 6" & 8" Auger  
 With Reversing Switch



Capacity: Up to 3000 Bu./Hr.  
*(Depending on grain and Moisture)*  
 Motor: 1/3 H.P., 115 V.  
 Powered: Oil Bath Gear Case  
 Weight: 75 lbs.  
 Bin Diameters: 18 Ft. to 36 Ft.  
 Reversible Switch to change from  
 Narrow to Wide Spread

**SA-95**  
**E-2 HIGH SPEED**  
 For 6" & 8" Auger  
 With Reversing Switch



Capacity: Up to 3000 Bu./Hr.  
*(Depending on grain and Moisture)*  
 Motor: 1/3 H.P., 115 V.  
 Powered: Oil Bath Gear Case  
 Weight: 75 lbs.  
 Bin Diameters: 42 Ft. to 48 Ft.  
 Reversible Switch to change from  
 Narrow to Wide Spread

**SA-96 & SA-97**  
**E-3 COMPACT**  
 For 10" Auger  
 Without or with Reversing Switch




Capacity: Up to 4000 Bu./Hr.  
*(Depending on grain and Moisture)*  
 Motor: 1/3 H.P., 115 V.  
 Powered: Oil Bath Gear Case  
 Weight: 77 lbs.  
 Bin Diameters: 18 Ft. to 36 Ft.  
 Vary the Spread by Tilting Pan

**SA-97-HS**  
**E-3 HIGH SPEED**  
 For 10" Auger  
 with Reversing Switch




Capacity: Up to 4000 Bu./Hr.  
*(Depending on grain and Moisture)*  
 Motor: 1/3 H.P., 115 V.  
 Powered: Oil Bath Gear Case  
 Weight: 77 lbs.  
 Bin Diameters: 36 Ft. to 48 Ft.  
 Reversible Switch to change from  
 Narrow to Wide Spread

**SA-103**  
**E-6**  
 For 12" Auger Up to 36' Bin

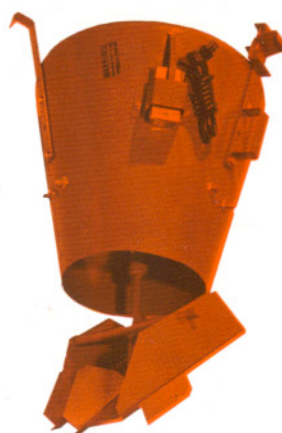

Capacity: Up to 6000 Bu./Hr.  
*(Depending on grain and Moisture)*  
 Motor: 1/2 H.P., 115 V.  
 Powered: Oil Bath Gear Case  
 Weight: 79 lbs.  
 Bin Diameters: 18 Ft. to 36 Ft.  
 Reversible Switch to change from  
 Narrow to Wide Spread

**SA-104-H.S.**  
**E-6**  
 For 42' & 48' Bins  
 12" Auger

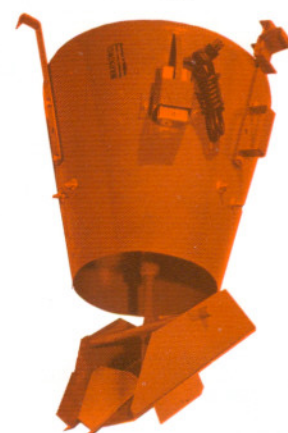

Capacity: Up to 6000 Bu./Hr.  
*(Depending on grain and Moisture)*  
 Motor: 1/2 H.P., 115 V. Totally Enc  
 Powered: Oil Bath Gear Case  
 Weight: 79 lbs.  
 Bin Diameters: 42 Ft. to 48 Ft.  
 Reversible Switch to change  
 Spreading Patterns

Note : 3 phase also available, specify voltage - 230V or 460 V.  
 Note: We recommend a Rev. Spreader on bins over 30'.

**In Grain Handling . . .  
 Let S.A.M. Do The Work**

### SPREAD-ALL MFG. CO

Agri-Systems, Inc.  
 2237 MARSHALL TOWN, IOWA 50158 • TELE: (515) 53-5601  
 24054 South Highway 22 • FAX: (515) 52-9748  
 Litchfield, MN 55355  
 320-693-6094




# SPREAD-ALL

## Grain Storage Equipment

### SA-105

1. Gravity Spreader designed to help keep fines out of center of smaller bins.
2. Light weight (32#) & comes assembled.
3. Has strong hanger straps (& a leveling strap).
4. Capacity - 4000 Bushels Per Hour.

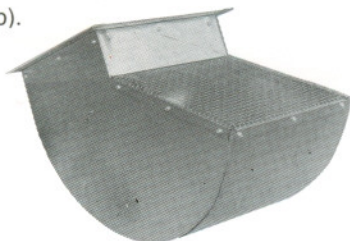

### ROOF VENTS ▲

Six Models Available  
70° and 90°



### SPREAD-ALL TRANSITIONS FEATURE : ▼

1. All Galvanized Steel
2. All Welded Construction
3. Completely Assembled
4. Transitions Have Access Doors
5. SA-82 (shown) can be shipped U.P.S.

### SA-98 Galvanized Gravity Spreader

1. To help keep fines from Center of Smaller Bins.
2. Light Weight 11#, (comes unassembled in box).



# SPREAD-ALL

## Complete Offering of Aeration Fans

These fans are designed for quiet, efficient aeration with a minimum of maintenance and operating cost.


Twelve models available...so you can get just the right fan to do the job right.

### Features:

- Models SA-12075 and SA-14100 feature 115 volt, single phase electric motors with plug cords wired.
- Standard leg stands and carrying handles.
- Powder coated fan guards.
- Completely factory assembled and test run before shipment.
- Reversible application to pull air down through the grain, or to direct the air flow up through the grain by turning the fan around and reversing guard.
- Either the intake or the discharge ends may be mounted to an air duct, metal transition, or a flat wall bin.

### OPTION:

- Magnetic contactor mounted in a weather proof enclosure.

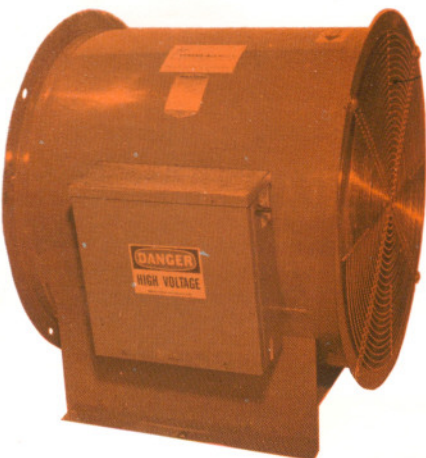

ROUND TUBE AERATION SYSTEMS AVAILABLE